

OFF-THE-ROAD TIRES



VLT

V-steel L-Traction



MAIN FEATURES

- **Designed for articulated dump trucks and front-end loaders**
- **Superior traction and maneuverability on soft, muddy terrain**
- **Self-cleaning and non-directional tread patterns**
- **High reliability, durability and long tread life**

VLT OFF-THE-ROAD TIRES

Tire size	Star rating	TRA code
20.5R25	MS	E3 L3
23.5R25	MS	E3 L3
26.5R25	MS	E3 L3
29.5R25	MS	E3 L3
750/65R25 (30/65R25)	MS	E3 L3

BRIDGESTONE OFF-THE-ROAD TIRES

VLT V-steel L-Traction


VLT (V-steel L-Traction) off-the-road radial tires are specially developed for earthmovers and front-end loaders operating on muddy surfaces. Unique tread design offers superb self-cleaning performance, assuring powerful traction on wet, soft, and muddy terrain.



Excellent traction and maneuverability


Ideal tread lug design contributes to obtain excellent maneuverability and traction on wet, soft and muddy terrain.

Tread design

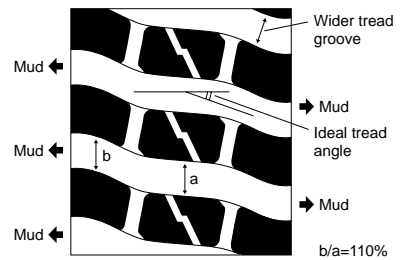

This lug design assures smooth mud rejection from the grooves.


Tread lug movement

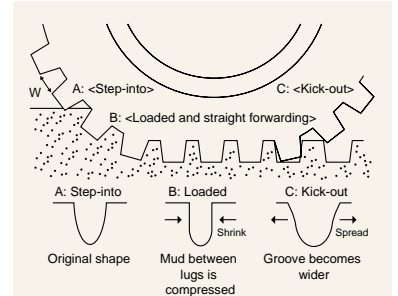

How is the mud ejected?

Catching the mud ≥ Powerful traction
 > Easy ejection of mud

Ideal lug angle alignment realizes the excellent traction.

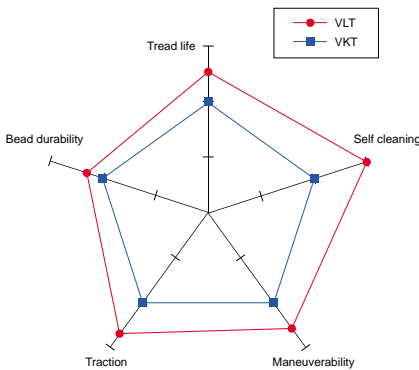

Tire Size	Star Rating*	Type*	Recommended Rim/Flange Height	Approximate Inflated Dimensions								OTD
				OD		OW		SLR		SLW		
				inch	mm	inch	mm	inch	mm	inch	mm	
20.5R25	MS	T/L	17.00/2.0	58.9	1495	21.0	533	26.6	676	23.1	586	40.0
23.5R25	MS	T/L	19.50/2.5	64.1	1629	24.1	612	28.9	734	26.8	680	42.5
26.5R25	MS	T/L	22.00/3.0	69.1	1755	26.6	675	31.0	787	29.0	736	45.0
29.5R25	MS	T/L	25.00/3.5	74.1	1881	30.0	762	33.1	840	32.7	830	48.0
750/65R25 (30/65R25)	MS	T/L	24.00/3.0	64.0	1625	30.1	765	28.3	718	32.7	831	43.0

*Note: MS: Multi-Star rating T/L: Tubeless type

Specifications are subject to change without notice.

